# SD VIEWER SOFTWARE USER GUIDE

A Walkthrough

\_ast Updated: 3/23/2022

# **Table of Contents**

Introduction	2
PC Requirements for Viewer Software	3
Install SD Viewer Software	4
Getting Acquainted	6
Change Viewing Settings	6
Format Your SD Card	7
Open Files	8
Know Your Playback Dashboard	9
Playback Controls	10
Visually Adjust Your Images	11
Tracking Driving Behaviors	12
Measuring Drive Data	12
Track Your Vehicle	14
Your Event Log	15
File Management	16
Privacy Settings & Masking	16
Save Your Files	18
Print Images	20
Backup Your Files	22
Exporting Your Files	23
Finishing Up	24

### Introduction

This guide aims to introduce and help our users understand the proper uses of the SD Viewer Software.

Use Ithe SD Viewer Software to review your camera's video files, edit video playback, display saved telematics data and export your altered video files to your PC.

If you have any trouble navigating the content of this manual or have some follow-up questions regarding the software, contact m2msupport@aampglobal.com for technical support details.

We hope that this comprehensive guide provides ample details regarding the commonly used functions of our SD Viewer Software.

# **PC Requirements for Viewer Software**


To use our SD Viewer Software, here are a few specifications we recommend for the **best possible** compatibility:

os	Windows 7/8/8.1/10 or Higher
CPU	Core 2 Duo 2.5GHz or Higher
RAM	2GB or Higher
Interface	SD Memory Card Reader
HDD Free space	Install: 55MB or Higher Backup: 4GB or Higher
Display	1024 x 768 pixel/True Color or Higher


**Caution:** If your computer doesn't meet these requirements, the PC Viewer Software may not work properly.

### **Install SD Viewer Software**

**Extract** and **open** the setup file from the downloaded .zip folder.




Select your preferred language. Then click **OK** to continue.

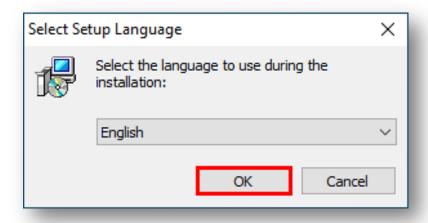

### **Install SD Viewer Software**

Follow the Wizard's prompts, then click **Finish**.

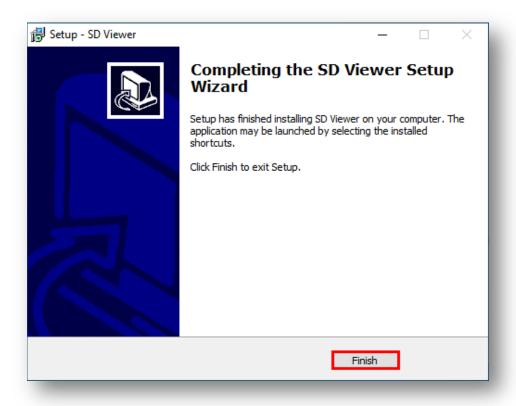

To confirm you've set up SD Viewer, look for the icon on your desktop.



**Note:** To un-install SD Viewer Software, exit the program. Open the **Control Panel** and select **Remove Program**.

### **Getting Acquainted**


To better navigate SD Viewer software, follow the sections below.

### **Change Viewing Settings**

To personalize your Viewing Settings, click



- Click Set Password. Enter any number between 1000-9999.
   Your PC sets Speed and Date formats automatically. However, you may change it here.
- 2. Choose your **Display Time**.
  - Use video time settings from your camera (determined during device configuration) or your computer's default time.
- 3. Select your SD Viewer Software layout.
  - The program launches with the Last Layout opened.
  - The program launches with the **Default Layout**.
- 4. Set graph scales for the Drive Data Window with **Drive Data Settings**.

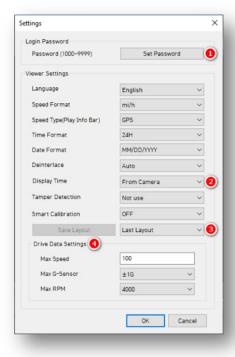

### **Format Your SD Card**




To open your SD Card in the Viewer Software, select

Next, choose your SD card drive, then click Ok.

### Click Open SD Card.


- 1. Your Continuous recording files.
- 2. Your **Event** recording files.
- 3. Activates the continuous play function.
- 4. Hide the playback list by closing the window.

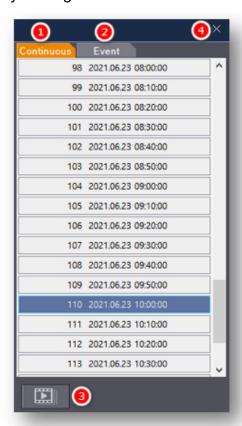

Display the playback list by clicking . End video playback by selecting .

### **Open Files**

Play specific files backed up on your PC or SD by clicking Select an MDT file and click **Open**.

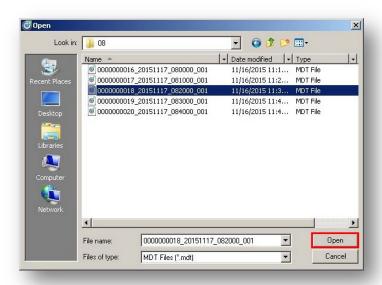

The file's image will display, then click Play to run the file.

When finished with SD Viewer, click and remove your SD card. You may use the **Safely Remove Hardware and Eject Media** option on your PC to eject your SD safely.

### **Know Your Playback Dashboard**


The main features of the SD Viewer's playback dashboard:

- 1. **Camera Title** The name of the camera from the configuration process (includes image resolution).
- 2. **Record Mode** Your preferred recording method.
- 3. **G-Sensor** Displays real-time G-Sensor values.
- 4. **Time** Shows date and time.
- 5. **Vehicle Number & Driver ID** Unique identification for each driver/vehicle.
- 6. **GPS Speed** Your speed reading.
- 7. **Display Frame/ Total Frames** The current frame and the number of frames captured on your device.



### **Playback Controls**

To better understand how you can control your SD Viewer Software, we outlined the playback controls below:

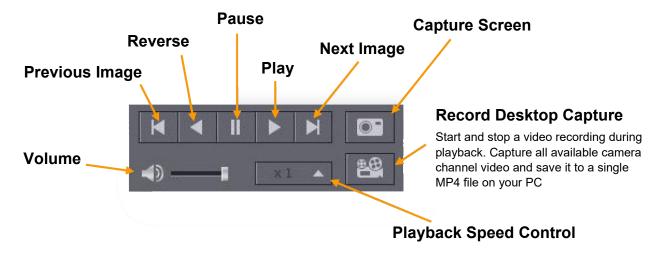


### **Alarm Indicator**

Your playback **Alarm Indicator** shows triggered alarms, if any, during an event or regular driving activities. Set alarms for different purposes, like Overspeed events, during your camera's configuration process.



### **Playback Control Bar**


With the **Playback Control Bar**, fast forward, rewind and locate specific moments in your device's recorded video footage.



### **Visually Adjust Your Images**

**Right click** on playback images in the SD Viewer Software to adjust and visually enhance your files.

- 1. Change your playback image **Display Ratio**.
- 5. You can **Zoom** in up 8x on images.
- 2. Alter your image's visual orientation by clicking **Mirror Mode** and **Flip Mode**.
- 6. To add mosaics or visually distort sensitive aspects of an image, click **Privacy Masking**. Click <u>here</u> to learn more about Privacy Masking functions.
- 7. Adjust a playback image's **Brightness** and **Contrast**.

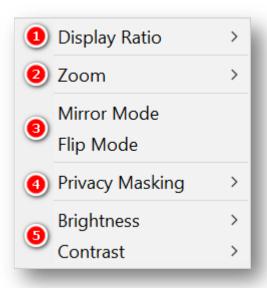

### **Tracking Driving Behaviors**


Fleet Managers and Drivers alike need to understand the patterns of driving behavior. SD Viewer helps to know various measurements surrounding alarm-triggered events.

### **Measuring Drive Data**

To access driver data, click




The SD Viewer's default setting displays G-Sensor graphs. Add other information by checking any of the following data points.

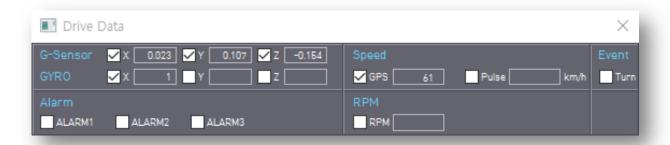

Your device's sensor data is on the graph below. However, the graph doesn't represent every data point you can enable in your settings.

Your G-Sensor is calibrated and zeroed out in the setup process, so positive shocks are (+) and negative shocks are (-).

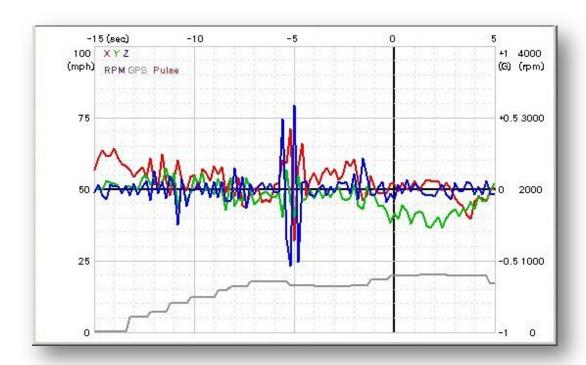

### G-Sensor:

- X value: Forward & Backward (Quick brake or Quick Start).
- Y value: Left & Right (Quick Turn).
- Z value: Up & Down (Prominence and Depression).

**GYRO** - Displays the vehicle's gyro values.

**Speed -** GPS measured speed is in grey.

**RPM** - The RPM displays in purple.


**ALARM** - The alarms will display on the bottom of the screen. The grey bar means the trigger is activated.

### **Track Your Vehicle**

To know where you are in your route, click Your route displays on Google Maps, as seen below.

To see this data, your GPS should record with video.

To see the map, your Viewer Software needs an internet connection.

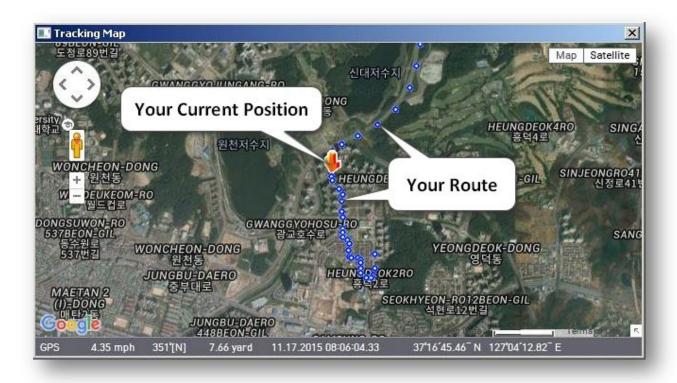


### **Your Event Log**



Event Search helps you find specific event data quickly.

- 1. Choose the time frame of the event you are looking for by selecting **Search Range**.
- 2. Set the conditions of the event.
- 3. Click Search.
- 4. Select an event from the search results.
- 5. To see the video feed, click **Go to Video**.

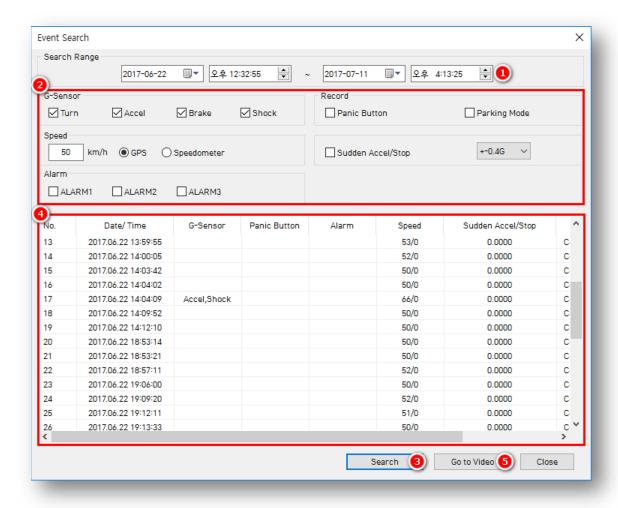

### **File Management**

In this section, learn more about editing, taking still images of saved footage and handling your video playback files.

### **Privacy Settings & Masking**


To access privacy settings and privacy masking mode, click



Ensure your video is paused and backed up on your PC before adding privacy masks.

Set mosaic areas on your video to blur sensitive information, such as a license plate #. Video playback files must be JPG or AVI.

- 1. Blur areas by left clicking on different sections. You can select multiple zones.
- 2. Unselect mosaics by right clicking blurred areas.
- 3. To select all mosaics in a frame, click Select All.
- 4. To unselect all areas, click UnSelect All.
- 5. If you are satisfied with your settings, click **Ok** to close the window.

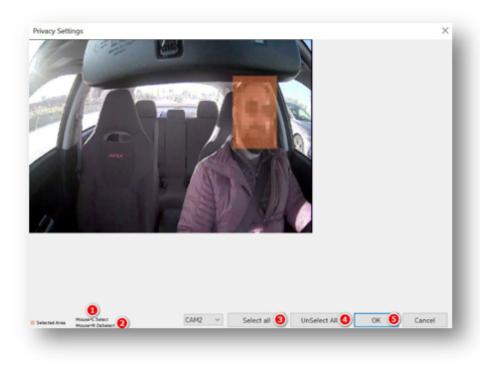


After adding a privacy mask, your edited video will look like the screen capture below.



### **Save Your Files**

To save a JPEG image of the SD Viewer playback, click


- 1. To save images from specific camera channels, select **CAM1**, **CAM2**, **CAM3** or **CAM4**.
- 2. Select which information to superimpose on the image file.
- 3. Choose your image save location.
- 4. Name your image file.
- 5. Click Start to save.

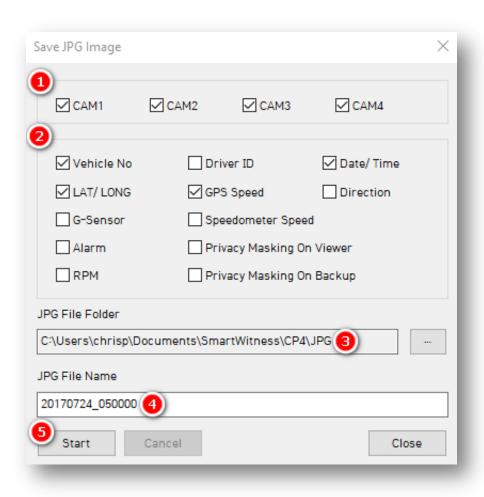



To save an MP4 video of the SD Viewer playback, click

- 1. To save video and audio from specific channels, select CAM1, CAM2, CAM3, CAM4 or Audio.
- 2. Select the time frame of your saved video recording and its duration.
- 3. Choose what information to superimpose on the video footage.
- 4. Choose your video's saved location.
- 5. Name your video file.
- 6. Click Start to save.

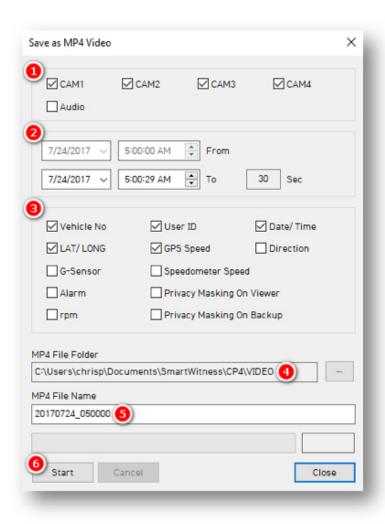


## **Print Images**




To print an image, pause your SD Viewer playback

Add context to your printed pictures, choose your capture settings and enter relevant additional info.

Finalize print preferences by clicking **Ok**.

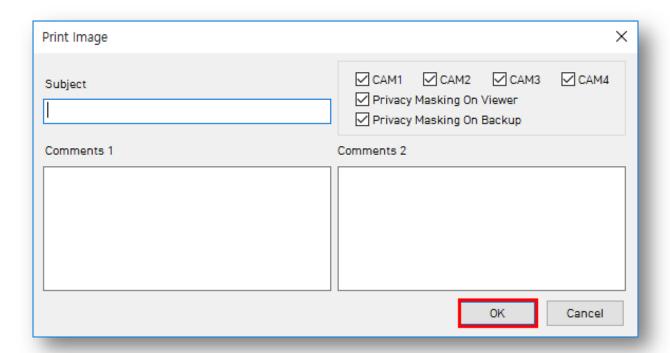

See your print preview below. If satisfied, continue to **Print**.

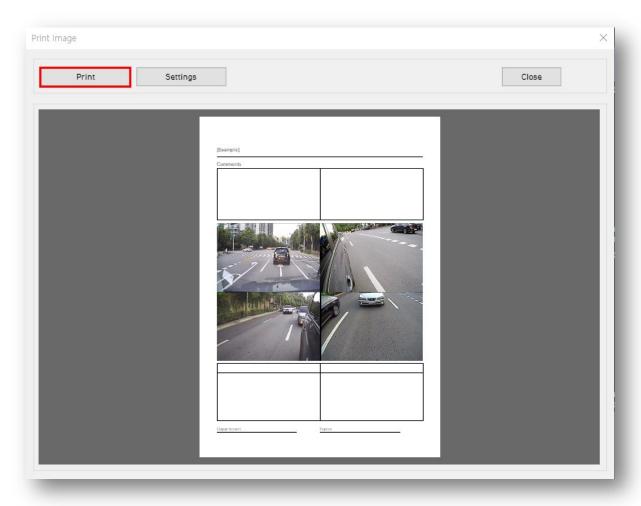


### **Backup Your Files**



To back up recorded data on your PC, click

- 1. Choose which camera feeds to back up.
- 2. Your start time begins when the video pauses. This cannot change once you begin. Set the runtime.
- 3. Set the amount of time to back up
- 4. Input a Title and Memo
- 5. For easy management, store your data by type. Select your preferred **Type** and click **Start**.

The max amount of time you can back up is one hour of data.

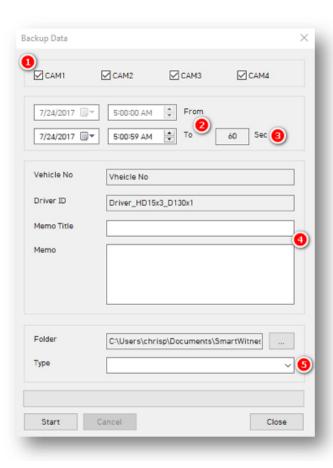


### **Exporting Your Files**



To use the data backup list to play backed up data files, click

- 1. Choose the folder where the backup files are at the bottom of the screen (It will automatically show the last folder accessed).
- 2. Then, select the **Type** by scrolling down the options.
- 3. The files are listed showing "Date/Time, Vehicle No., Driver ID, Memo Title."
- 4. Check the box next to the file you wish to back up and click **Ok**.
- 5. To export a specific file, check that file and click **Export**.

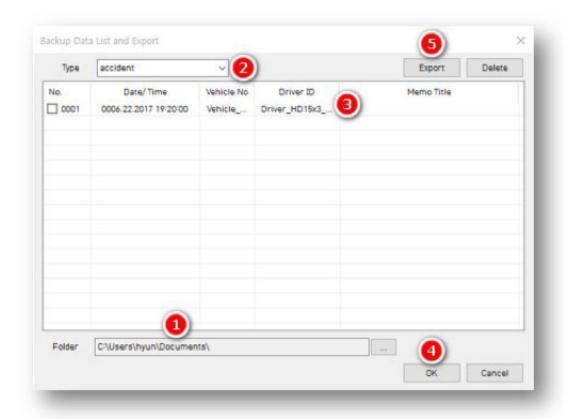

# **Finishing Up**

Congrats! You have acquired the skills and means to operate the SD Viewer Software.

If you need technical support, email m2msupport@aampglobal.com